

# TORSRAND AB

BJÄRNUM - SWEDEN




40X60 M

## TENT HALLS

# DELTA

SPAN 30 TO 50 M

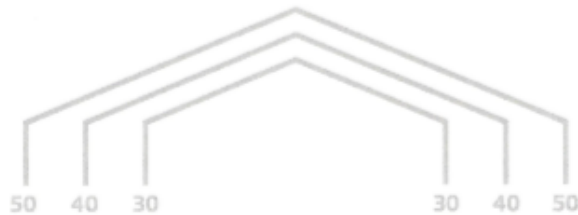

### Technical Description

The main structural profile size 304mm x 136mm x 6mm and 10mm is made of Hard Pressed Extruded Structural Aluminum alloy, anodized according to QU-ALANOD:2004. Connecting components are made of S355 steel welded according to certificate SLV DIN 18800 and hot dipped galvanized according to standard PN EN ISO 1461 for perfect corrosion resistance.

Tent Halls are structures with no permanent anchoring to the ground.


As standard, the DELTA structure is coated with PVC textile of specific weight about 670g/m<sup>2</sup> or 900g/m<sup>2</sup>. The textile is hardly flammable complying to: DIN 4102 B1 certified by MPA Universität Stuttgart (Otto-Graf-Institut), to DIN EN 13501-1: B-s2 d0 certified by IBS – Linz Institut für Brandschutztechnik und Sicherheitsforschung Gesellschaft m.b.H. and to M2 certified by IFTH site de Lyon.

Alternatively, sidewalls can be made of 0.5mm thick trapezoidal steel sheet T35, or 60.0mm thick sandwich panel in any color offered according to RAL table.

The Tent Hall is assembled on a well leveled, hard surface. DELTA tents can be mounted on concrete footing. All Tent Halls are made according to technical documentation based on current standards and regulations.





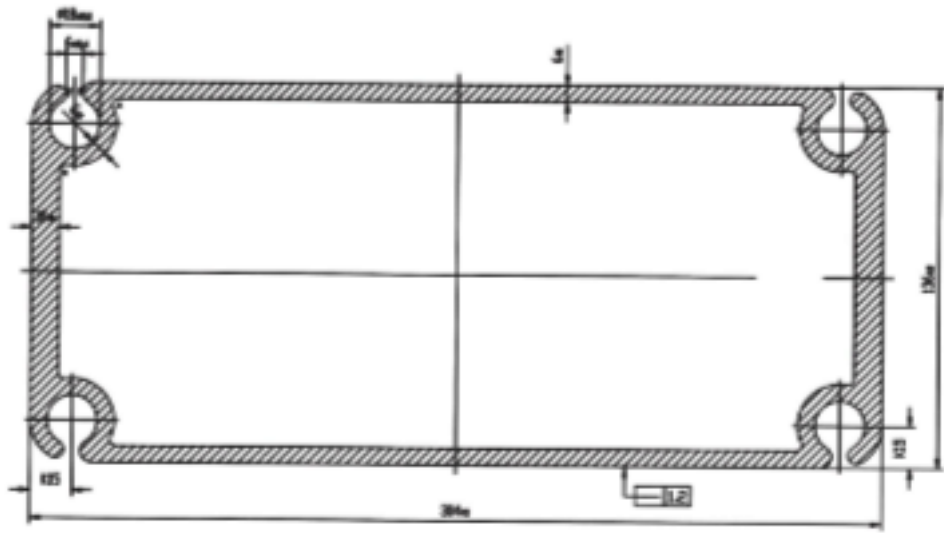

steel connector corner



D<sup>o</sup> - steel connector top



feet side



feet forefront

## DELTA halls

width 40,0 m

